


PERFORMANCE:

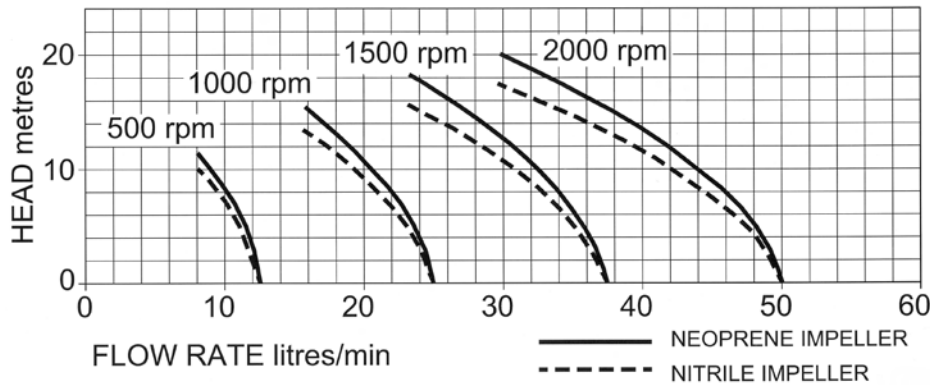


MODEL	Maximum flow rate		Maximum head	
	l/min	gall/min	metres	feet
4900-200	50	11	20	65
4900-237	50	11	17	55

Max Power absorbed 550 watt at 2000rpm

DIMENSIONS:

WEIGHT: 1.5Kg

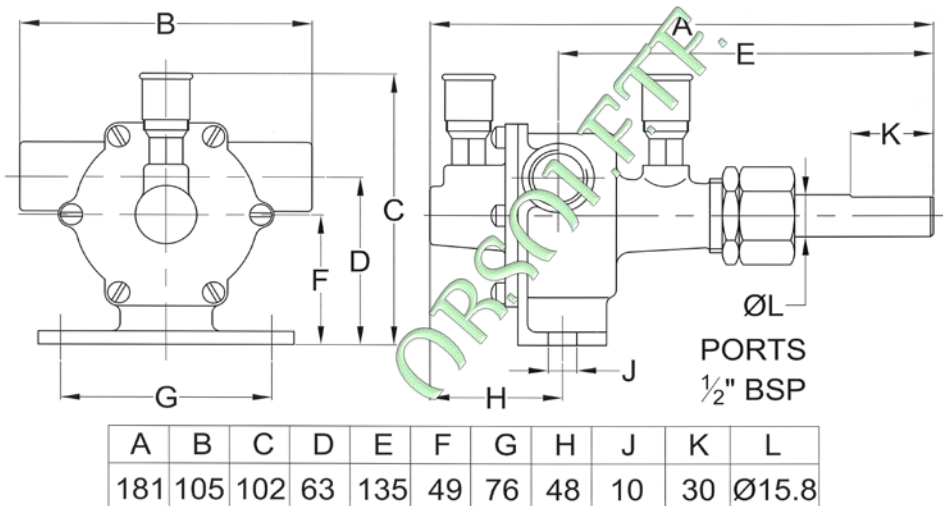

MATERIALS OF CONSTRUCTION:

Body	Bronze
Impeller	Neoprene or Nitrile
Wearplate	Not fitted
Shaft	Stainless steel
Shaft seal	Packed gland
Bearings	Plain
Port type	1/2" BSP to BS21 (DIN2999)

MODELS:

4900-200 Standard Neoprene Impeller

4900-237 Oil resistant Nitrile



BRONZE FLEXIBLE IMPELLER PEDESTAL PUMP

4900 SERIES



PUMP with 1/2" BSP PORTS

- * Constructed from marine quality bronze and stainless steel
- * Self-prime from dry up to 2.4m
- * Easy to service and maintain
- * Will tolerate abrasive wear
- * Handles hard and soft solids without clogging
- * Can pump in either direction
- * Will not airlock



Xylem Water Solutions UK Ltd
Bingley Road • Hoddesdon • Hertfordshire • EN11 0BU • UK

Telephone: +44 (0)1462 480380 Fax: +44 (0)1462 482422
mail@clegghorn.co.uk www.jabscoshop.com